Get Started with your LIFEBOOK® T902 Notebook

This guide will lead you through the start-up process for your new LIFEBOOK notebook and will also provide some valuable tips. To learn about all the exciting features that your new LIFEBOOK notebook has to offer, please see the User's Guide that can be accessed after completing the start-up procedure.

ENGLISH

FUJITSU

This convenient guide will lead you through the start-up process and will also offer some valuable tips.

What's in the Box

Check to see that all of the following items are in the box:

- LIFEBOOK notebook
- Lithium ion battery, pre-installed
- AC adapter with power cord

Depending upon your configuration, the following items may also be shipped with your notebook:

- Recovery / Bootable disc
- Microsoft Product Identifier (bi-fold paper contains Microsoft Office product key for activation

Controls, Connectors, and Access Points

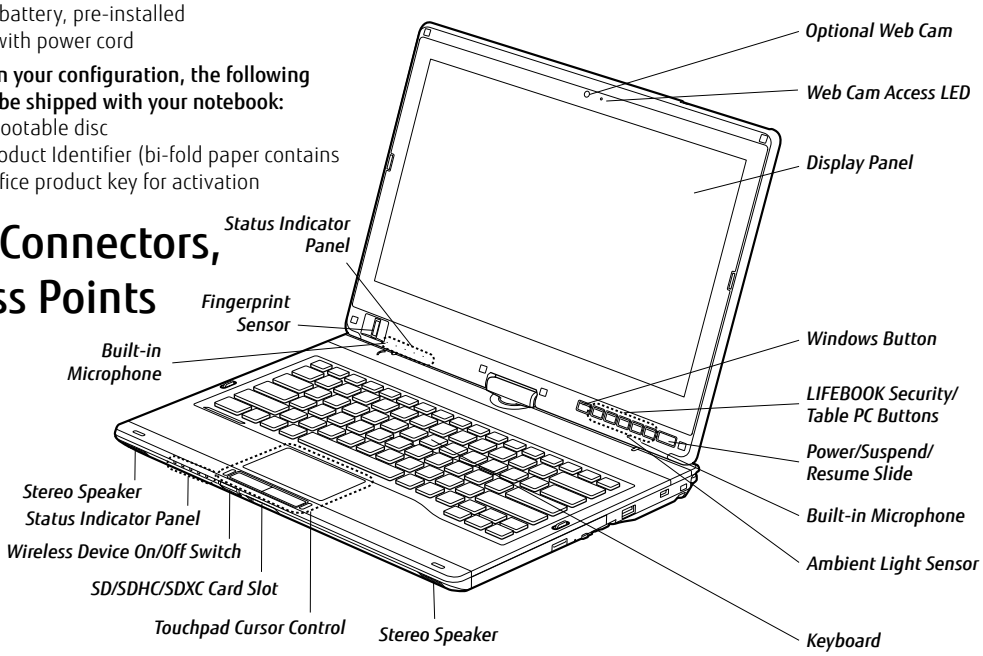

LEFT PANEL

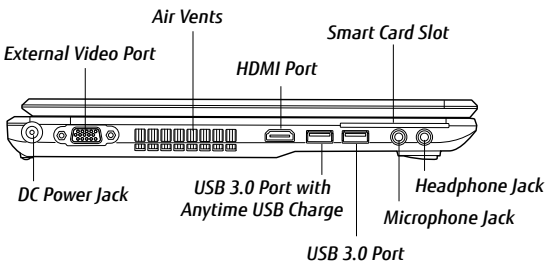

RIGHT PANEL

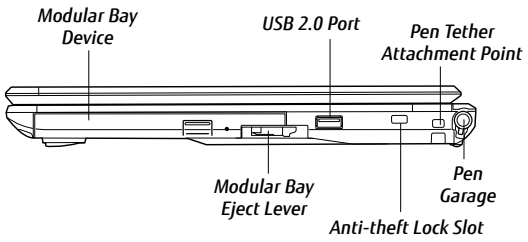

BACK PANEL

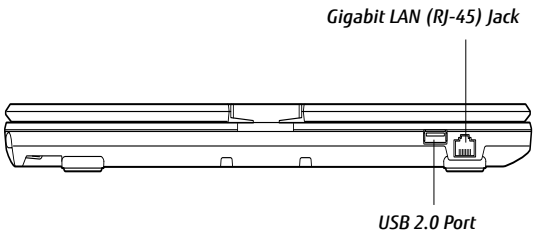

BOTTOM PANEL

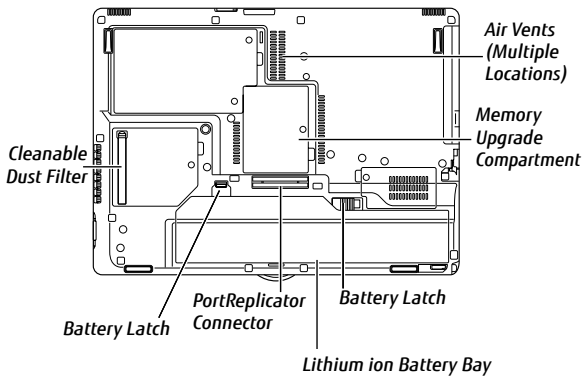

Initial Start Up



1. Open the Display Panel

- Ensure that your LIFEBOOK is on a hard level surface and that the air vents are not blocked.
- Carefully lift the display, and adjust until it is at a comfortable viewing angle.

2. Convert from Notebook to Tablet

- Open your notebook and lift the display so it is perpendicular to the keyboard.
- Rotate the display 180 degrees (either direction).
- Carefully fold the display down onto the keyboard.
- Reverse this procedure to return to the notebook configuration.
- Be sure to rotate the display in the opposite direction.



3. Connect AC Power

- Plug the power cord into the AC adapter and plug the AC adapter into your notebook.
- Connect the power cord to an electrical outlet.



4. Booting the System

- We strongly recommend that you do not attach any external devices until you have gone through the initial power on sequence.
- Slide the Power/Suspend/Resume button.
- The notebook is now on and the battery is being charged.
- When you turn on your notebook for the first time, it will display a Fujitsu logo on the screen.

If you do nothing the system will load the operating system, and then the Windows Welcome will begin.



5. Starting Windows® for the First Time

- After you boot up the system the first time and follow the instructions on the screen, you will eventually come to the Welcome window. After the Welcome window appears, the screen will black out for **up to several minutes.** This is normal. **DO NOT ATTEMPT TO POWER DOWN THE SYSTEM AT THIS POINT.** While the screen is blacked out, your system configuration is being set up and the necessary files are being installed.
- During the course of the first start up, you will need to read and accept the End User License Agreements (EULAs) for Microsoft and Fujitsu.

If you reject the terms of the license agreement you will be asked to review the license agreement for information on returning Windows® or to shut down your LIFEBOOK .

You cannot use your LIFEBOOK until you have accepted the license agreement. If you stop the process your TABLET PC will return to the beginning of the Windows® Welcome Process, even if you shut your LIFEBOOK down and start it up again.



6. Connect to the Internet or Network

- Ensure the Wireless Status Indicator is "On," or– Connect an Ethernet cable (not supplied) to the LAN jack on your notebook and to a wall jack or to Ethernet router (not included).
- **Register your LIFEBOOK with Fujitsu Service and Support via our website (http://solutions.us.fujitsu.com/www/content/support/). This helps us to better serve you.**

7. Activate Additional Utilities, Applications, & Drivers

- You can launch desktop icon "Fujitsu Bonus Apps" to see if there are any additional applications available for the system. Bonus Apps contains optional applications. You can select individual or all software that is available. BonusApps will automatically install for you.

8. Create backup media with MyRecovery

- Click on the [MyRecovery] icon to create backup recovery media and application discs.
- Look in the User's Guide (Troubleshooting Your LIFEBOOK) for more detailed instructions.



9. User's Guide

- Your electronic User's Guide contains important detailed information about your new computer. You can access your User's Guide by selecting its icon from the screen desktop.
  (You will need to be connected to the Internet.)

Common Indicators

Status Display Panel

The Status Display Panel is located below the keyboard. The indicators are only visible when the unit is on. Following are some common indicators.

Power Indicator
Shows whether your system is operational. It lets you know what mode your Tablet PC is in.

- **Steady On (Blue):** This means that there is power to your Tablet PC and that it is ready for use.
- **Flashing:** This means that your Tablet PC is in Sleep mode.
- **Steady Off:** This means that your system is either in Hibernate mode, or that your tablet has been turned off.

Battery Charging Indicators
Shows whether the Lithium ion battery (Battery 1) or the optional modular battery (Battery 2) are installed and charging.

Battery Level Indicator
The Battery Level indicators display the charge level of the indicated battery pack, as follows:

- **Green, solid:** Battery is between 51% and 100% charged.
- **Orange, solid:** Battery is between 13% and 50% charged.
- **Red, solid:** Battery is between 0% and 12% charged.
- **Orange, blinking:** Blinks during battery status measurement (Four seconds after the battery is installed).
- **Red, blinking:** There is a problem with the battery.
- **Off:** There is no battery installed.

- If the battery pack is installed while the power is turned off, the battery level indicator will display the charge level for five seconds after it blinks orange.
- If the ac adapter is not connected or the battery pack is not fully charged when the computer is switched to sleep mode, the indicator will blink. the led blinks at the rate of one second on/five seconds off.

- Batteries subjected to shocks, vibration or extreme temperatures can be permanently damaged.
- A shorted battery is damaged and must be replaced

Hard Drive/Optical Drive Access Indicator
Shows whether your internal hard drive or optical drive are being accessed is being accessed.

Security Indicator
Flashes (if a password was set) when the system resumes from Off
or Hibernation modes. You must enter the password that was set
in the Security Panel before your system will resume operation.

NumLk Indicator
Showsthat the integral keyboard is set in ten-key numeric keypad mode.

CapsLock Indicator
Shows that your keyboard is set to type in all capital letters.

ScrLk Indicator
Shows that your scroll lock is active.

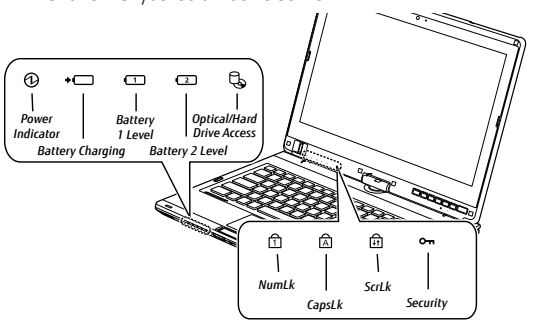

Quick Tips

It takes approximately 3 hours to charge a fully discharged single battery with unit off or in suspend mode.

Optimizing Battery Life
- Set power management setting for best battery life.
- Adjust display brightness levels to lowest comfortable setting.
- Utilize Suspend mode when not using your notebook.
- Read the Power Management section in your User's Guide for additional features.

Adjusting Display Brightness
- Fn + F6 to decrease brightness | • Fn + F7 to increase brightness

Adjusting Volume
- Fn + F8 to decrease volume | • Fn + F9 to increase volume

Heat damage to your Lithium ion battery
- Extended exposure to heat will have a negative impact on your battery. Do not expose your notebook to excessive heat such as leaving it in the car on a hot summer day. If you are near an outlet and playing a graphics-intensive game, it is recommended that you remove the battery from the unit to avoid exposing it to excessive heat.

Discharging your battery
- Full battery discharges (to unit shutdown or 0%) should be avoided. It is recommended that batteries only be partially discharged to levels of 20-30% before recharging.

Prolonged storage
- If your notebook isn't going to be used for a while, you should remove its Lithium ion battery. To store a battery for long periods of time, its charge capacity should be around 40% and store it in a cool dry place.

Purchasing a replacement battery
- Only purchase a replacement battery from Fujitsu. Ensure that you purchase a battery that is specifically designed for your model computer. It is recommended that you purchase a replacement battery only when the current battery has noticeably degraded; unused batteries will still suffer degradation when stored.

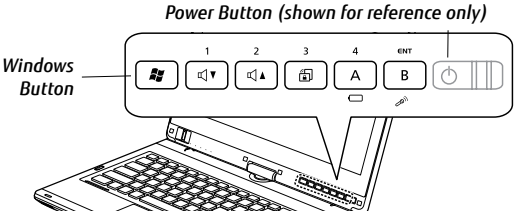

Button	Security Panel Button Functions	Pre-Logon	Post-Logon
	<None>	<None>	Windows®
1	Security Button 1	<Esc>	Volume Down
2	Security Button 2	Tab Left	Volume Up
3	Security Button 3	Rotate	Rotation Lock
4 A	Security Button 4	Tab Right	Application Button A
ENT B	Security Enter Button	Enter	Application Button B

Note: There is no Ctrl+Alt+Del button. For Ctrl+Alt+Del function, press and hold the Windows button, then slide the Power button. Ctrl+Alt+Del action will be started after both buttons have been held for 0.75 seconds.

Save these Instructions

For Authorized Repair Technicians Only

Warning
- DANGER OF EXPLOSION IF LITHIUM (CLOCK) BATTERY IS INCORRECTLY REPLACED. REPLACE ONLY WITH THE SAME OR EQUIVALENT TYPE RECOMMENDED BY THE MANUFACTURER. DISPOSE OF USED BATTERIES ACCORDING TO THE MANUFACTURER'S INSTRUCTION.

Caution
- FOR CONTINUED PROTECTION AGAINST RISK OF FIRE, REPLACE ONLY WITH THE SAME TYPE AND RATING FUSE.

Recycling your battery

Over time, the batteries that run your mobile computer will begin to hold a charge for a shorter amount of time; this is a natural occurrence for all batteries. When this occurs, you may want to replace the battery with a fresh one*.

If you replace it, it is important that you dispose of the old battery properly because batteries contain materials that could cause environmental damage if disposed of improperly.

Fujitsu is very concerned with environmental protection, and has enlisted the services of the Rechargeable Battery Recycling Corporation (RBRC)**, a non-profit public service organization dedicated to protecting our environment by recycling old batteries at no cost to you.

RBRC has drop-off points at tens of thousands of locations throughout the United States and Canada. To find the location nearest you, go to www.RBRC.org or call 1-800-822-8837.

If there are no convenient RBRC locations near you, you can also go to the EIA Consumer Education Initiative website (http://EIAE.org/) and search for a convenient disposal location.

Remember – protecting the environment is a cooperative effort, and you should make every effort to protect it for current and future generations.

* To order a new battery for your Fujitsu mobile computer, go to the Fujitsu shopping site at www.shopfujitsu.com in the US or www.fujitsu.ca/products/notebooks in Canada.

** RBRC is an independent third party to which Fujitsu provides funding for battery recycling; RBRC is in no way affiliated with Fujitsu.

Important Safety Instructions

This unit requires an A C adapter to operate. Use only UL Listed I. T .E. Adapters with an output rating of 19 VDC, with a current of 4.22A (80W)

AC adapter output polarity:

When using y our note book equipment, basic safety precautions should always be followed t o reduce the risk of fire , electric shock and injury to persons, including the following:

- Do not use this product near water for example, near a bathtub, washbowl, kitchen sink or laundry tub, in a wet basement or near a swimming pool.
- Use only the power cord and batteries indicated in this guide or the User's Manual. Do not dispose of batteries in a fire.
  They may explode.
  Check with local codes for possible special disposal instructions.
- **CAUTION:** Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.

FUJITSU

Popular Accessories

Additional Main Lithium ion Battery
Auto/Airline Power Adapter
Additional AC Adapter
Carrying Cases
Notebook Keyed Lock
Port Replicator

Have questions or need help?

- Visit our website at solutions.us.fujitsu.com
- Call us anytime at 1.800.8FUJITSU
- Email us at 8fujitsu@us.fujitsu.com

Want more information on Fujitsu products?

- Visit our website at www.shopfujitsu.com
- Call us anytime at 1.800.FUJITSU

Fujitsu Extended Service Plans available.

Visit us.fujitsu.com/computers
to purchase any of these accessories
or to get more information.

Record your notebook serial number here:
Serial #_____
(see bottom of computer)

Fujitsu America, Inc.
1250 E. Arques Avenue
Sunnyvale, CA 94085

Fujitsu, the Fujitsu logo, and LIFEBOOK are registered trademarks of Fujitsu Limited. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. All other trademarks mentioned herein are the property of their respective owners. Product description data represents Fujitsu design objectives and is provided for comparative purposes; actual results may vary based on a variety of factors. Specifications are subject to change without notice.

©2012 Fujitsu America, Inc. All rights reserved.

B6FJ-8311-01EN-00